

## GLOBAL STABILITY OF LINEARIZING CONTROL WITH A NEW ROBUST NONLINEAR OBSERVER OF THE INDUCTION MOTOR

MOHAMMED CHENAF A\*, ABDELLAH MANSOURI\*, ABDERRAHMANE BOUHENNA\*  
ERIC ETIEN\*\*, ABDELKADER BELAIDI\*, MOULOUD AZZEDINE DENAI\*

\* Department of Electrical Engineering  
E.N.S.E.T. Oran, Laboratory of Automatics and Systems Analysis (L.A.A.S.)  
BP 1523 El M'naouer, Oran, Algeria  
e-mail: chenafa@enset-oran.dz

\*\* Laboratoire d'Automatique et d'Informatique Industrielle  
Ecole Supérieure d'Ingénieurs de Poitiers, Université de Poitiers  
40, Avenue du Recteur Pineau, 86022 Poitiers Cedex, France  
e-mail: erik.etien@esip.univ-poitiers.fr

This paper mainly deals with the design of an advanced control law with an observer for a special class of nonlinear systems. We design an observer with a gain as a function of speed. We study the solution to the output feedback torque and rotor flux-tracking problem for an induction motor model given in the natural frame. We propose a new robust nonlinear observer and prove the global stability of the interlaced controller-observer system. The control algorithm is studied through simulations and applied in many configurations (various set points, flux and speed profiles and torque disturbances), and is shown to be very efficient.

**Keywords:** nonlinear observer, linearizing control, induction motor, global stability

### 1. Introduction

Induction motors are nonlinear, coupled, multivariable processes. Nevertheless, they become more and more appealing because of their reliability, robustness and low cost of maintenance (Van Raumer, 1994). We built a globally stable nonlinear control law with real effectiveness for the adopted strategies and we describe a speed dependent observer. We based the initial strategy on input-output linearization (Chiason, 1997; De Luca and Ulivi, 1989; Isidori, 1989). Here we redesign the observer based on a control law in order to ensure the global stability of the process-observer-controller system (Lubineau *et al.*, 1999). The main contributions of the paper are the following: First, we propose a new observer modified for a special class of nonlinear systems applied to the induction motor (Busawon *et al.*, 1998; Gauthier and Bornard, 1981). Secondly, a globally stable nonlinear observer based on a control law is designed. Lastly, intensive simulations in different conditions are performed to show that the general strategy proposed is very efficient.

We organize the paper as follows: we present in Section 2 the induction motor model. In Section 3, we present a nonlinear observer, an application to the induction motor, the control algorithm and the global stability proof.

In Section 4, we give simulation results and comment on them with implementations in Matlab-Simulink.

### 2. Model of the Induction Motor

The model used is a traditional induction model of Park in a stator  $(\alpha, \beta)$  fixed reference frame related to the stator, given by (Mansouri *et al.*, 2004):

$$\dot{x} = f(x) + g u, \quad (1)$$

with

$$x = [i_{s\alpha}, i_{s\beta}, \varphi_{r\alpha}, \varphi_{r\beta}, \Omega]^T, \quad u = [u_{s\alpha}, u_{s\beta}]^T.$$

Here  $x$  contains four electrical states (flux and current components, respectively  $\varphi_{r\alpha}$ ,  $\varphi_{r\beta}$  and  $i_{s\alpha}$ ,  $i_{s\beta}$ ) and one mechanical state  $\Omega$  governed by a mechanical equation. The motor is driven by two voltage components,  $u_{s\alpha}$  and  $u_{s\beta}$ . We define the control input matrix by

$$g = \begin{bmatrix} \frac{1}{\sigma L_s} & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{\sigma L_s} & 0 & 0 & 0 \end{bmatrix}^T$$

with

$$T_r = \frac{L_r}{R_r}, \quad \sigma = 1 - \frac{M^2}{L_s L_r}, \quad K = \frac{M}{\sigma L_s L_r},$$

$$\gamma = \frac{R_s}{\sigma L_s} + \frac{R_r M^2}{\sigma L_s L_r^2},$$

$$f(x) = \begin{bmatrix} -\gamma i_{s\alpha} + \frac{K}{T_r} \varphi_{r\alpha} + p\Omega K \varphi_{r\beta} \\ -\gamma i_{s\beta} - p\Omega K \varphi_{r\alpha} + \frac{K}{T_r} \varphi_{r\beta} \\ \frac{M}{T_r} i_{s\alpha} - \frac{1}{T_r} \varphi_{r\alpha} - p\Omega \varphi_{r\beta} \\ \frac{M}{T_r} i_{s\beta} + p\Omega \varphi_{r\alpha} - \frac{1}{T_r} \varphi_{r\beta} \\ p \frac{M}{J_m L_r} (\varphi_{r\alpha} i_{s\beta} - \varphi_{r\beta} i_{s\alpha}) - \frac{f_m \Omega}{J_m} - \frac{\tau_L}{J_m} \end{bmatrix}, \quad (2)$$

where  $L_r, L_s, M$  are rotor, stator and mutual inductances, respectively,  $R_r$  and  $R_s$  are rotor and stator resistances,  $\sigma$  is the scattering coefficient,  $T_r$  is the time constant of the rotor dynamics,  $J_m$  is the rotor inertia,  $f_m$  is the mechanical viscous damping,  $p$  is the number of pole pairs,  $\tau_L$  is the external load torque.

### 3. Nonlinear Control with Global Stability

We can solve the global stability problem using global tools such as Lyapunov functions. In this section, we first design an observer. It is an observer for a special class of nonlinear systems, applied to the induction motor and enriched for a further analysis. Secondly, we design a control law. We base this control law on linearizing control and we modify it in order to ensure global stability. We then establish global stability using a Lyapunov function (Lubineau *et al.*, 1999).

#### 3.1. Nonlinear Observer and Application to the Induction Motor

In this section, based on extensions of the observer design strategy to the multi-output case (Busawon *et al.*, 1998) and the application to the induction motor, we propose a new observer with nonlinear terms. We are going to apply the result given in the preceding part to construct a full-order observer for an induction motor written in the  $\alpha, \beta$  Park frame (Verghese and Sanders, 1988). The proposed observer uses the measurements of the stator voltage and current, and the rotor speed. More precisely, we design the observer up to an injection of the speed measurements so that only the electrical equations are considered. First,

we define

$$x_e = [i_{s\alpha}, i_{s\beta}, \varphi_{r\alpha}, \varphi_{r\beta}]^T,$$

$$\hat{x}_e = [\hat{i}_{s\alpha}, \hat{i}_{s\beta}, \hat{\varphi}_{r\alpha}, \hat{\varphi}_{r\beta}]^T, \quad (3)$$

$$\tilde{x}_e = x_e - \hat{x}_e,$$

where  $x_e, \hat{x}_e$  and  $\tilde{x}_e$  are respectively the real state, estimated state and observation error vectors. We have

$$\dot{\hat{x}}_e = \begin{bmatrix} -\gamma & 0 & \frac{K}{T_r} & p\Omega K \\ 0 & -\gamma & -p\Omega K & \frac{K}{T_r} \\ \frac{M}{T_r} & 0 & -\frac{1}{T_r} & -p\Omega \\ 0 & \frac{M}{T_r} & p\Omega & -\frac{1}{T_r} \end{bmatrix} \hat{x}_e$$

$$+ g u - \begin{bmatrix} -k_1 & 0 \\ 0 & -k_1 \\ -\frac{k_2}{T_r} & p\Omega k_2 \\ -p\Omega k_2 & -\frac{k_2}{T_r} \end{bmatrix} \begin{bmatrix} \tilde{i}_{s\alpha} \\ \tilde{i}_{s\beta} \end{bmatrix} + \begin{bmatrix} f_{i\alpha} \\ f_{i\beta} \\ 0 \\ 0 \end{bmatrix}, \quad (4)$$

where  $f_{i\alpha}$  and  $f_{i\beta}$  will be defined in Section 3.3, and

$$k_1 = 2\theta,$$

$$k_2 = \frac{T_r^2 \theta^2}{K[1 + (p\Omega T_r)^2]}. \quad (5)$$

This leads to the following error equations:

$$\dot{\tilde{x}}_e = \begin{bmatrix} -\gamma - k_1 & 0 & \frac{K}{T_r} & p\Omega K \\ 0 & -\gamma - k_1 & -p\Omega K & \frac{K}{T_r} \\ \frac{M}{T_r} - \frac{k_2}{T_r} & p\Omega T_r k_2 & -\frac{1}{T_r} & -p\Omega \\ -p\Omega T_r k_2 & \frac{M}{T_r} - \frac{k_2}{T_r} & p\Omega & -\frac{1}{T_r} \end{bmatrix} \tilde{x}_e - \begin{bmatrix} f_{i\alpha} \\ f_{i\beta} \\ 0 \\ 0 \end{bmatrix}. \quad (6)$$

We show the diagram block of this observer in Fig. 1.

We shall perform the stability study in the next part by considering the whole system process-observer-controller.

#### 3.2. Control Algorithm

We design a control algorithm based on feedback linearization (Marino *et al.*, 1993). The two controlled outputs of the system form the square of the flux norm in

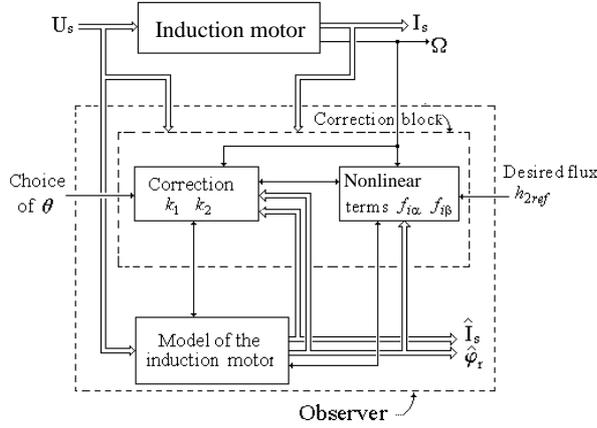


Fig. 1. Nonlinear observer block diagram.

the machine. This is to avoid magnetic saturation and to work in the mode of overspending where the limitation of the tension norm imposes the reduction in the flux norm  $h_2(x)$  and the electromagnetic torque  $h_1(x)$  (Grellet and Clerc, 1996). We express them as

$$\begin{aligned} h_1(x) &= p \frac{M}{L_r} (i_{s\beta} \varphi_{r\alpha} - i_{s\alpha} \varphi_{r\beta}), \\ h_2(x) &= \varphi_{r\alpha}^2 + \varphi_{r\beta}^2. \end{aligned} \quad (7)$$

Both the variables are unknown. We define the observed outputs as

$$\begin{aligned} \hat{h}_1(x) &= p \frac{M}{L_r} (\hat{i}_{s\beta} \hat{\varphi}_{r\alpha} - \hat{i}_{s\alpha} \hat{\varphi}_{r\beta}), \\ \hat{h}_2(x) &= \hat{\varphi}_{r\alpha}^2 + \hat{\varphi}_{r\beta}^2. \end{aligned} \quad (8)$$

We define the derivatives of  $\hat{h}_1$  and  $\hat{h}_2$  as (Van Raumer, 1994; Lubineau *et al.*, 1999):

$$\begin{aligned} \dot{\hat{h}}_1 &= L_f \hat{h}_1 + L_{g1} \hat{h}_1 u_{s\alpha} + L_{g2} \hat{h}_1 u_{s\beta}, \\ \dot{\hat{h}}_2 &= L_f \hat{h}_2, \end{aligned} \quad (9)$$

where

$$\begin{aligned} L_f \hat{h}_1 &= \frac{pM}{L_r} \left( -\hat{f}_1 \hat{\varphi}_{r\beta} + \hat{\varphi}_{r\alpha} \hat{f}_2 + \hat{i}_{s\beta} \hat{f}_3 - \hat{i}_{s\alpha} \hat{f}_4 \right), \\ L_{g1} \hat{h}_1 &= -\frac{pM}{L_r} \frac{1}{\sigma L_s} \varphi_{r\beta}, \\ L_{g2} \hat{h}_1 &= \frac{pM}{L_r} \frac{1}{\sigma L_s} \varphi_{r\alpha}, \\ L_f \hat{h}_2 &= 2\hat{\varphi}_{r\alpha} \hat{f}_3 + 2\hat{\varphi}_{r\beta} \hat{f}_4, \end{aligned} \quad (10)$$

$$\begin{aligned} L_{g1} \hat{h}_1 &= -\frac{pM}{L_r} \frac{1}{\sigma L_s} \varphi_{r\beta}, \\ L_{g2} \hat{h}_1 &= \frac{pM}{L_r} \frac{1}{\sigma L_s} \varphi_{r\alpha}, \\ L_f \hat{h}_2 &= 2\hat{\varphi}_{r\alpha} \hat{f}_3 + 2\hat{\varphi}_{r\beta} \hat{f}_4, \end{aligned} \quad (11)$$

with

$$\begin{aligned} \hat{f}_1 &= -\gamma \hat{i}_{s\alpha} + \frac{K}{T_r} \hat{\varphi}_{r\alpha} + p\Omega K \hat{\varphi}_{r\beta} + 2\theta \tilde{i}_{s\alpha} + f_{i\alpha}, \\ \hat{f}_2 &= -\gamma \hat{i}_{s\beta} - p\Omega K \hat{\varphi}_{r\alpha} + \frac{K}{T_r} \hat{\varphi}_{r\beta} + 2\theta \tilde{i}_{s\beta} + f_{i\beta}, \\ \hat{f}_3 &= \frac{M}{T_r} \hat{i}_{s\alpha} - \frac{1}{T_r} \hat{\varphi}_{r\alpha} - p\Omega \hat{\varphi}_{r\beta} + \frac{k_2}{T_r} \tilde{i}_{s\alpha} - p\Omega k_2 \tilde{i}_{s\beta}, \\ \hat{f}_4 &= \frac{M}{T_r} \hat{i}_{s\beta} + p\Omega \hat{\varphi}_{r\alpha} - \frac{1}{T_r} \hat{\varphi}_{r\beta} + p\Omega k_2 \tilde{i}_{s\alpha} + \frac{k_2}{T_r} \tilde{i}_{s\beta}. \end{aligned}$$

Since  $L_f \hat{h}_2$  is not a function of the control inputs, one should derive them once again. However,  $L_f \hat{h}_2$  contains terms which are functions of currents. The differentiation of those terms introduces terms of flux, which are unknown. To overcome this problem, we write this as (Isodori, 1989):

$$L_f \hat{h}_2 = -\frac{2}{T_r} \hat{h}_2 + \hat{h}_3 + \Delta, \quad (12)$$

where

$$\begin{aligned} \hat{h}_3 &= 2 \frac{M}{T_r} (\hat{i}_{s\alpha} \hat{\varphi}_{r\alpha} + \hat{i}_{s\beta} \hat{\varphi}_{r\beta}), \\ \Delta &= 2 \left( \frac{k_2}{T_r} \hat{\varphi}_{r\alpha} + k_2 p\Omega \hat{\varphi}_{r\beta} \right) \tilde{i}_{s\alpha} \\ &\quad + 2 \left( -k_2 p\Omega \hat{\varphi}_{r\beta} + \frac{k_2}{T_r} \hat{\varphi}_{r\beta} \right) \tilde{i}_{s\beta}, \end{aligned} \quad (13)$$

$\hat{h}_3$  is an artificial auxiliary output to control. Let us differentiate  $\hat{h}_3$ :

$$\dot{\hat{h}}_3 = L_f \hat{h}_3 + L_{g1} \hat{h}_3 u_{s\alpha} + L_{g2} \hat{h}_3 u_{s\beta} \quad (14)$$

with

$$\begin{aligned} L_f \hat{h}_3 &= \frac{pM}{T_r} \left( \hat{\varphi}_{r\alpha} \hat{f}_1 + \hat{\varphi}_{r\beta} \hat{f}_2 + \hat{i}_{s\alpha} \hat{f}_3 + \hat{i}_{s\beta} \hat{f}_4 \right), \\ L_{g1} \hat{h}_3 &= \frac{2M}{T_r} \frac{1}{\sigma L_s} \varphi_{r\alpha}, \\ L_{g2} \hat{h}_3 &= \frac{2M}{T_r} \frac{1}{\sigma L_s} \varphi_{r\beta}. \end{aligned} \quad (15)$$

This leads, finally, to

$$\begin{aligned} \dot{\hat{h}}_1 &= L_f \hat{h}_1 + L_{g1} \hat{h}_1 u_{s\alpha} + L_{g2} \hat{h}_1 u_{s\beta}, \\ \dot{\hat{h}}_2 &= L_f \hat{h}_2, \\ \dot{\hat{h}}_3 &= L_f \hat{h}_3 + L_{g1} \hat{h}_3 u_{s\alpha} + L_{g2} \hat{h}_3 u_{s\beta}, \end{aligned} \quad (16)$$

$$\begin{bmatrix} \dot{\hat{h}}_1 \\ \dot{\hat{h}}_2 \\ \dot{\hat{h}}_3 \end{bmatrix} = \begin{bmatrix} L_f \hat{h}_1 + L_{g1} \hat{h}_1 u_{s\alpha} + L_{g2} \hat{h}_1 u_{s\beta} \\ -\frac{2}{T_r} \hat{h}_2 + \hat{h}_3 + \Delta \\ L_f \hat{h}_3 + L_{g1} \hat{h}_3 u_{s\alpha} + L_{g2} \hat{h}_3 u_{s\beta} \end{bmatrix}. \quad (17)$$

The errors between the desired trajectory of the outputs and the estimated outputs are

$$\begin{bmatrix} e_1 \\ e_2 \\ e_3 \end{bmatrix} = \begin{bmatrix} \hat{h}_1 - h_{1\text{ref}} \\ \hat{h}_2 - h_{2\text{ref}} \\ \hat{h}_3 - h_{3\text{ref}} \end{bmatrix}.$$

Let us design the control inputs as

$$\begin{bmatrix} u_{s\alpha} \\ u_{s\beta} \end{bmatrix} = \begin{bmatrix} L_{g1} \hat{h}_1 & L_{g2} \hat{h}_1 \\ L_{g1} \hat{h}_3 & L_{g2} \hat{h}_3 \end{bmatrix}^{-1} \begin{bmatrix} -L_f \hat{h}_1 - k_{p1} e_1 + \dot{h}_{1\text{ref}} \\ -L_f \hat{h}_3 - e_2 - k_{p3} e_3 + \dot{h}_{3\text{ref}} \end{bmatrix}. \quad (18)$$

This leads to

$$\begin{bmatrix} \dot{e}_1 \\ \dot{e}_2 \\ \dot{e}_3 \end{bmatrix} = \begin{bmatrix} -k_{p1} e_1 \\ -\frac{2}{T_r} \hat{h}_2 + \hat{h}_3 + \Delta - \dot{h}_{2\text{ref}} \\ -e_2 - k_{p3} e_3 \end{bmatrix}, \quad (19)$$

where  $h_{1\text{ref}}$  and  $h_{2\text{ref}}$  are known references. The aim now is to define  $h_{3\text{ref}}$  as

$$h_{3\text{ref}} = \frac{2}{T_r} \hat{h}_2 + \dot{h}_{2\text{ref}} - k_{p2} e_2, \quad (20)$$

which leads to

$$\begin{bmatrix} \dot{e}_1 \\ \dot{e}_2 \\ \dot{e}_3 \end{bmatrix} = \begin{bmatrix} -k_{p1} e_1 \\ -k_{p2} e_2 + e_3 + \Delta \\ -e_2 - k_{p3} e_3 \end{bmatrix}. \quad (21)$$

An appropriate choice of the positive constants  $k_{p1}$ ,  $k_{p2}$  and  $k_{p3}$  ensures the exponential convergence of the tracking errors.

We show a detailed scheme of the nonlinear control with the observer in Fig. 2.

### 3.3. Proof of Global Stability

We now consider all the elements together in order to build an ultimate observer based on the control law. Let us define the function

$$V_1(\tilde{x}_e) = \frac{\tilde{i}_{s\alpha}^2 + \tilde{i}_{s\beta}^2}{2} + \frac{\tilde{\varphi}_{r\alpha}^2 + \tilde{\varphi}_{r\beta}^2}{2\gamma_2}, \quad (22)$$

where  $\gamma_2$  is a positive constant, and the function

$$V_2(e) = \frac{e_1^2 + e_2^2 + e_3^2}{2}. \quad (23)$$

We can choose a Lyapunov function candidate for the global system (process-observer-controller) as  $V = V_1 + V_2$ . Its derivative is

$$\begin{aligned} \dot{V} = & -k_{p1} e_1^2 - k_{p2} e_2^2 - k_{p3} e_3^2 + \Delta e_2 \\ & - (\gamma + k_1) (\tilde{i}_{s\alpha}^2 + \tilde{i}_{s\beta}^2) - \frac{1}{T_r \gamma_2} (\tilde{\varphi}_{r\alpha}^2 + \tilde{\varphi}_{r\beta}^2) \\ & + \left( \frac{K}{T_r} + \frac{M}{T_r \gamma_2} - \frac{k_2}{T_r \gamma_2} \right) (\tilde{i}_{s\alpha} \tilde{\varphi}_{r\alpha} + \tilde{i}_{s\beta} \tilde{\varphi}_{r\beta}) \\ & - [f_{i\alpha} \tilde{i}_{s\alpha} + f_{i\beta} \tilde{i}_{i\beta}] \\ & + p\Omega \left( K - \frac{k_2}{\gamma_2} \right) [\tilde{i}_{s\alpha} \tilde{\varphi}_{r\beta} - \tilde{i}_{s\beta} \tilde{\varphi}_{r\alpha}]. \quad (24) \end{aligned}$$

The following three conditions form a sufficient set of conditions ensuring  $\dot{V} < 0$  by

$$\begin{aligned} & - [f_{i\alpha} \tilde{i}_{s\alpha} + f_{i\beta} \tilde{i}_{i\beta}] + \Delta e_2 = 0, \\ k_1(\theta) & > \frac{M^2}{4T_r \gamma_2} - \gamma \Rightarrow \theta > \frac{M^2}{8T_r \gamma_2} - \frac{1}{2}\gamma, \quad (25) \\ k_2(\theta, \Omega) & = K \gamma_2. \end{aligned}$$

Replacing  $\Delta$  by its value (13) leads to the following equation:

$$\begin{aligned} [f_{i\alpha} \tilde{i}_{s\alpha} + f_{i\beta} \tilde{i}_{i\beta}] = & 2 \left[ \frac{k_2}{T_r} \tilde{\varphi}_{r\alpha} + k_2 p \Omega \tilde{\varphi}_{r\beta} \right] \tilde{i}_{s\alpha} e_2 \\ & + 2 \left[ -k_2 p \Omega \tilde{\varphi}_{r\alpha} + \frac{k_2}{T_r} \tilde{\varphi}_{r\beta} \right] e_2. \quad (26) \end{aligned}$$

Equation (26) is satisfied if  $f_{i\alpha}$  and  $f_{i\beta}$  are chosen as

$$\begin{aligned} f_{i\alpha} = & 2 \left[ \frac{k_2}{T_r} \tilde{\varphi}_{r\alpha} + k_2 p \Omega \tilde{\varphi}_{r\beta} \right] e_2, \\ f_{i\beta} = & 2 \left[ -k_2 p \Omega \tilde{\varphi}_{r\alpha} + \frac{k_2}{T_r} \tilde{\varphi}_{r\beta} \right] e_2. \quad (27) \end{aligned}$$

$V$  is then a Lyapunov function for the overall system. Consequently, the whole process is stable and the convergence is exponential. We ensure flux and torque tracking. Then we can add a speed feedback loop to ensure the speed tracking.

## 4. Results and Simulations

### 4.1. Simulation Block Diagrams, Motor Data and a Benchmark

We design the general block diagram as shown in Fig. 3. In addition to that, we perform a simulation with Matlab-Simulink by using the benchmark in Fig. 4 and the motor

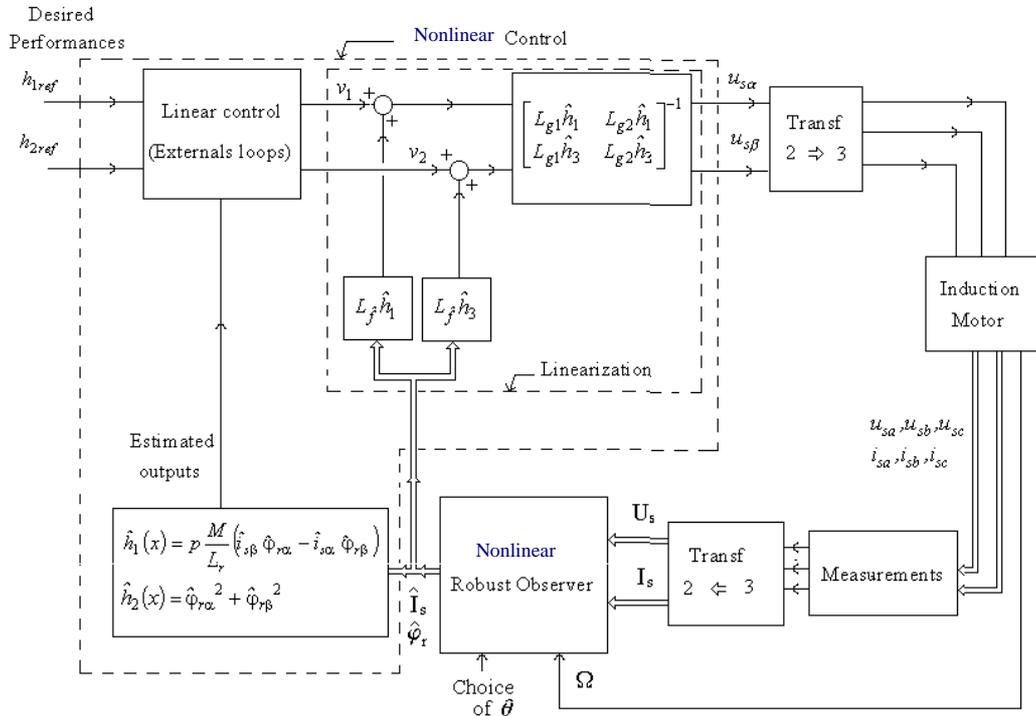


Fig. 2. Detailed scheme of the nonlinear control with an observer.

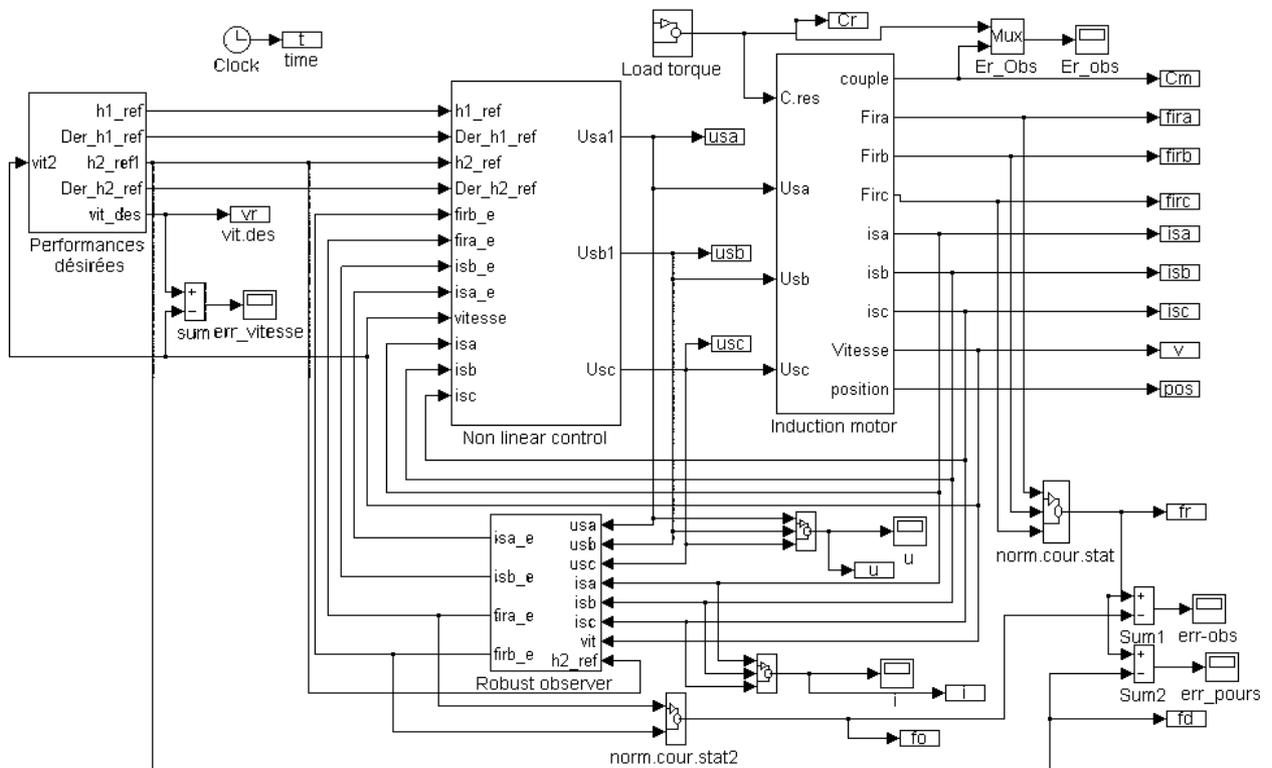


Fig. 3. General block diagram in Simulink.

Table 1. Parameters of the induction motor.

Designation	Parameter	Value
Rotor resistance	$R_r$	4.3047 $\Omega$
Stator resistance	$R_s$	9.65 $\Omega$
Mutual inductance	$M$	0.4475 H
Stator inductance	$L_s$	0.4718 H
Stator inductance	$L_r$	0.4718 H
Rotor inertia	$J_m$	0.0293 kg·m <sup>2</sup>
Pole pair	$p$	2
Viscous friction coefficient	$f_m$	0.0038 N·m·sec·rad <sup>-1</sup>
Mechanical power	$P_{mec}$	1.1 KW
Nominal voltage	$V_{sn}$	220 V
Nominal current	$I_{sn}$	2.6 A
Nominal speed	$\Omega_{sn}$	1410 Nm

parameters given in Table 1 (Cauët, 2001). This benchmark (Bodson and Chiasson, 1992; Lubineau et al., 1992) reveals the following profile: a rise in speed, a load, inversion speed and a load in recovery, and a return at a low speed.

We study the performance of the new nonlinear observer in an open loop. Then we associate it in a closed loop with the nonlinear control of the induction motor where we choose  $\theta = 5$ . This gives the dynamics of the observer close to those of the motor as shown in Fig. 5.

Figure 4 gives the reference trajectories of the speed, flux and load torque.

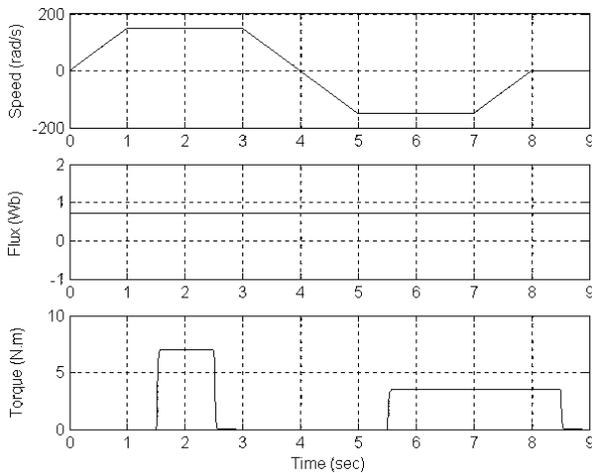


Fig. 4. Reference trajectories.

### 4.2. Study of the Nonlinear Observer in an Open Loop

First, we simulate the trajectory of the poles of the motor and the nonlinear observer, cf. (5), obtained with  $\theta = 5$ . Secondly, in Fig. 6 we show a good observation error of the rotor flux at different speeds (0.0125, 3.4 and 150 rad/s), simulated for  $\theta = 30$ .

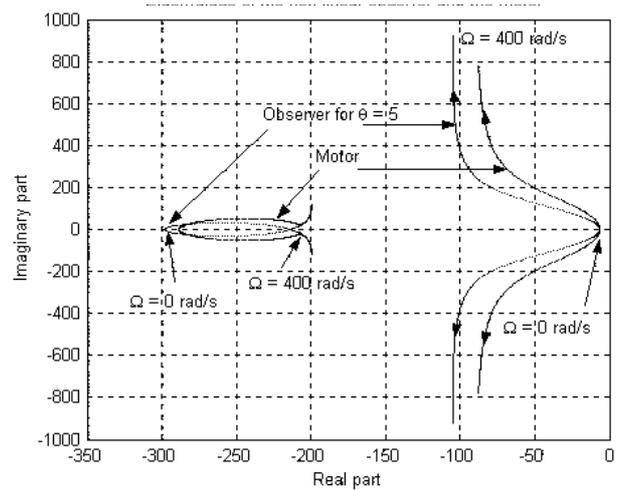


Fig. 5. Pole trajectory of the motor and the nonlinear observer.

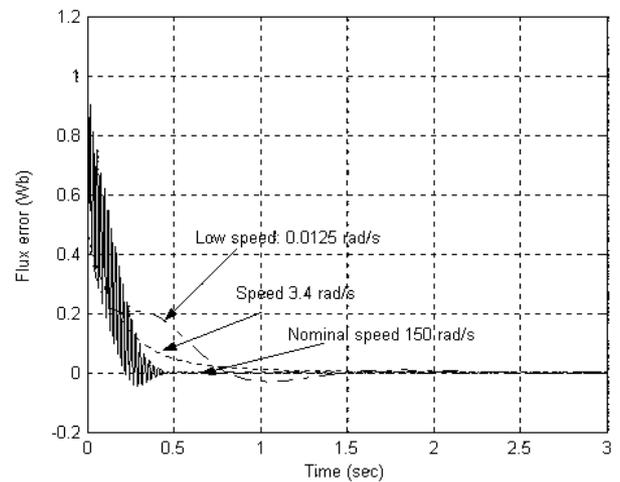


Fig. 6. Observation errors of the rotor flux ( $\theta = 30$ ).

Note that we initialize the rotor flux in the observer with  $\varphi_{ra_0} = \varphi_{r\beta_0} = 0.5$  Wb. Finally, in Fig. 7 we study sensitivity to rotor resistance disturbances for three values of  $R_r = (4.3047, 6.4571, 8.034) \Omega$ , i.e. an increase by 50% and 100%, respectively. We can show the robustness of the proposed nonlinear observer. Nevertheless, we note the existence of a static error, which increases with the variation of the rotor resistance.

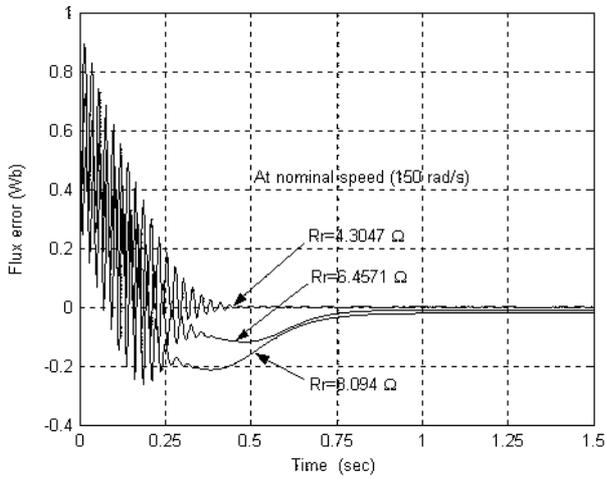


Fig. 7. Sensitivity to rotor resistance disturbances.

**4.3. Performance of Linearizing Control Associated with the Nonlinear Observer**

**Speed error tracking**

During an increase or a decrease in the speed, an error speed of  $\pm 0.6$  rad/s is observed. When the speed is constant, this error is cancelled. The peaks appear at the time of the abrupt variations in the load torque. Their amplitudes depend on its value, as shown in Fig. 8.

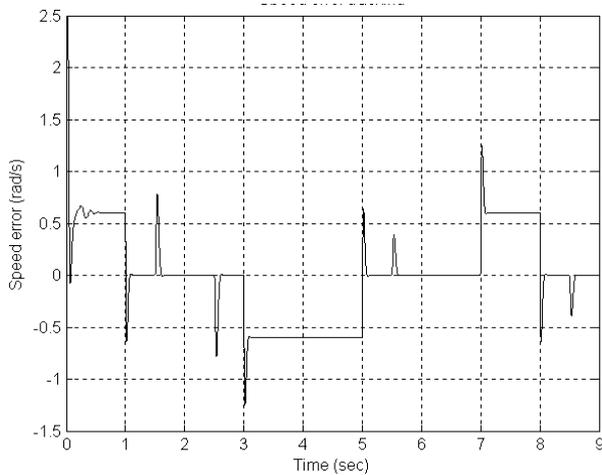


Fig. 8. Speed error tracking.

**Torque**

We note that the drive torque follows the load torque when the speed is constant. During an increase or decrease in the speed, a difference of  $\pm 5$  Nm appears between the two torques, as shown in Fig. 9.

**Rotor flux errors**

We note a very good tracking by looking at the two errors of observation and regulation as shown in Figs. 10–11.

The transient response between  $t = 0$  and  $0.5$  s is due to the initialization of the rotor flux norm with  $0.707$  Wb.

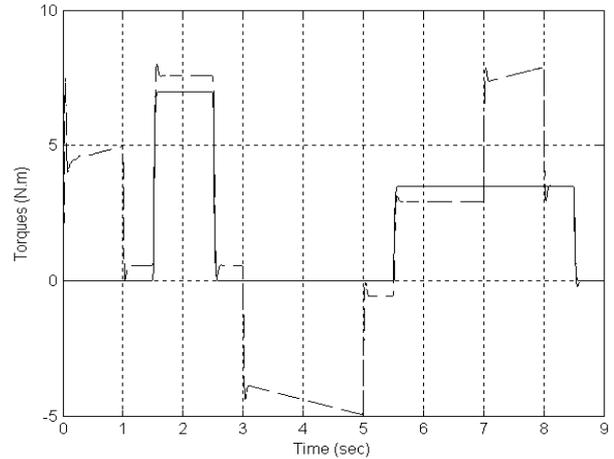


Fig. 9. Motor and load torques.

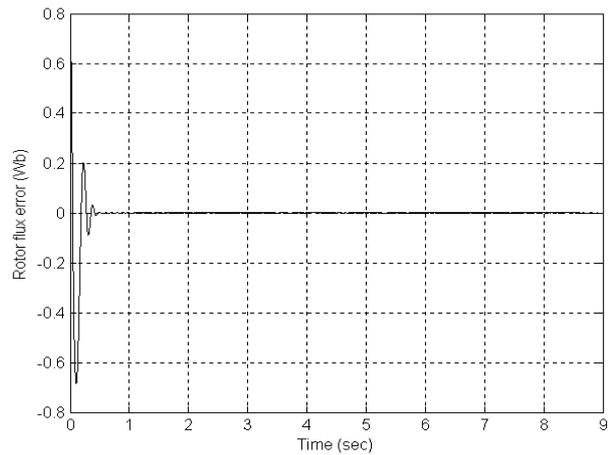


Fig. 10. Observation error of the rotor flux.

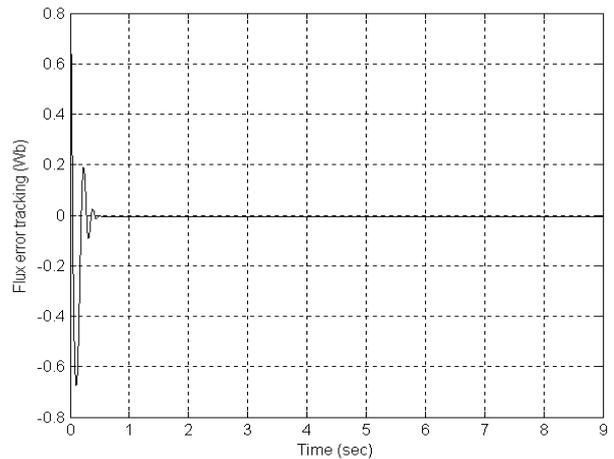


Fig. 11. Rotor flux error tracking.

**Stator current norm**

We show the plot of the norm stator current in Fig. 12. The norm of the current is equal to 3.5 A, in the interval

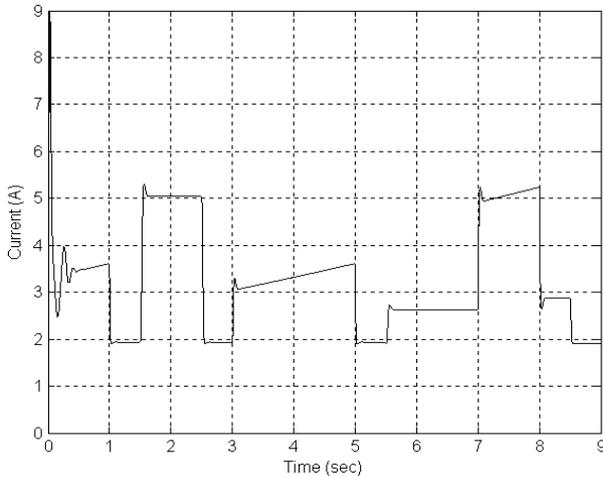


Fig. 12. Stator current norm.

of  $t = [0 \ 1]$  s,  $t = [3 \ 5]$  s because the speed increase and the load torque are zero. Between  $t = [1 \ 1.5]$  s,  $[2.5 \ 3]$  s,  $[5 \ 5.5]$  s and  $[8.5 \ 9]$  s, the norm is minimal and equal to 1.9 A. In this phase, the speed is constant and the load torque is zero. The amplitude of the current reaches a maximum value of 5 A at  $t = [1.5 \ 2.5]$  s, because a load torque of 7 Nm appears at that point. Speed remains always constant. Between  $t = [5.5 \ 7]$  s and  $[8 \ 8.5]$  s, the norm reaches 2.6 A and 2.8 A, respectively, because a load torque of 3.55 Nm takes place. Again speed remains constant. During this phase, and between  $t = [7 \ 8]$  s, the norm increases sharply because of the linear variation in speed.

**Stator voltage control**

The three stator control voltages follow the profile of the norm current, except if speed varies linearly. Their amplitude varies in the same proportions, as shown in Fig. 13.

**5. Conclusion**

In this paper, we presented a new robust observer based on a nonlinear control scheme for an induction motor. The observer proposed in this study offers the advantage of only one tuning parameter  $\theta$ . The adaptation gain of the rotor flux depends on speed. The global stability (motor, controller, and observer) was established with a carefully built Lyapunov function that keeps the observer dynamics free. Intensive simulations in a wide operating domain such as low and high speed, constant flux and various torque disturbances were performed in Matlab-Simulink

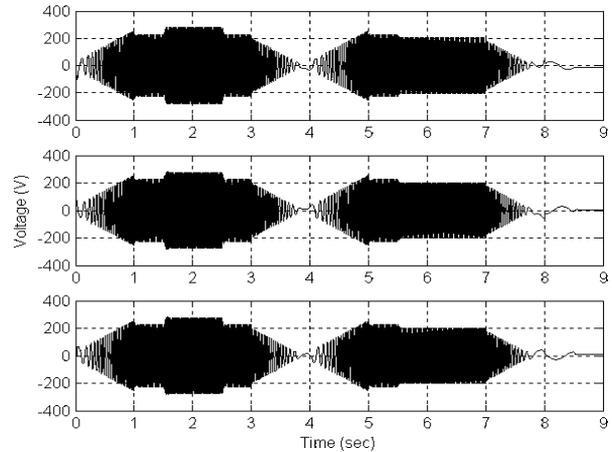


Fig. 13. Stator control.

and justified the interest in such an observer based on linear control laws. The results of simulations regarding the observation of rotor flux, the robustness of the observer, the speed and torque tracking and the rotor flux tracking confirm the theory suggested. We wish to validate these results in real time.

**References**

Bodson M. and Chiasson J. (1992): *A systematic approach for selecting optimal flux references in induction motors.* — Proc. IEEE IAS Annual Meeting, Houston, TX, USA, pp. 531–537.

Busawon K., Farza M. and Hammouri H. (1998): *Observer designs for a special class of nonlinear systems.* — Int. J. Contr., Vol. 71, No. 3, pp. 405–418.

Cauët S. (2001): *Contribution à l'analyse et la synthèse de lois de commande robustes pour la machine asynchrone.* — Ph.D. thesis, Université de Poitiers, Ecole Supérieure d'Ingénieurs de Poitiers, Ecole Doctorale des Sciences pour l'Ingénieur, France.

Chiasson J. (1997): *A new approach to dynamic feedback linearization control of an induction motor.* — IEEE Trans. Automat. Contr., Vol. 43, No. 3, pp. 391–397.

De Luca A. and Ulivi G. (1989): *Design of an exact non-linear controller for induction motors.* — IEEE Trans. Automat. Contr., Vol. 34, No. 12, pp. 1304–1307.

Gauthier J.P. and Bornard G. (1981): *Observability for any u(t) of a class of nonlinear systems.* — IEEE Trans. Automat. Contr., Vol. 26, No. 4, pp. 922–926.

Grellet G. and Clerc G. (1996): *Actionneurs électriques. Principes. Modèles. Commandes.* — Paris: Eyrolles.

Isidori A. (1989): *Non-linear Control Systems.* — Berlin: Springer.

- Lubineau D., Dion J.M., Dugar L. and Roye D. (1999): *La synthèse d'un contrôleur non linéaire avancé pour les moteurs à induction et la validation expérimentale sur référence industrielle*. — Laboratoire d'Automatique de Grenoble, CNRS, INGP, UJF, France.
- Mansouri A., Chenafa M., Bouhenna A. and Etien E. (2004): *Powerful nonlinear observer associated with the field-oriented control of the induction motor*. — *Int. J. Appl. Math. Comput. Sci.*, Vol. 14, No. 2, pp. 209–220.
- Marino R., Peresada S. and Valigi P. (1993): *Adaptive input-output linearizing control of induction motors*. — *IEEE Trans. Automat. Contr.*, Vol. 38, No. 2, pp. 208–221.
- Van Raumer T. (1994): *Commande non-linéaire d'une machine asynchrone*. — Ph.D. thesis, Laboratoire d'Electrotechnique et d'Electronique Industrielle de Toulouse, France.
- Verghese G.C. and Sanders S.R. (1988): *Observers for flux estimation in induction machines*. — *IEEE Trans. Ind. Electron.*, Vol. 35, No. 1, pp. 85–94.

Received: 30 March 2004  
Revised: 6 November 2004  
Re-revised: 17 Januar 2005

